
FFWLCLC42

Base Product



Singlemode LC/UPC to LC/UPC, Fiber Patch Cord, 1.6 mm Duplex, Low Smoke Zero Halogen (LSZH)

Product Classification

Regional Availability	Asia | Australia/New Zealand | China | Europe | India | Latin America | Middle East/Africa | North America
Portfolio	CommScope®
Product Type	Fiber patch cord, duplex
Product Brand	SYSTIMAX InstaPATCH® 360
Product Series	FFW
Ordering Note	For lengths greater than 999 ft (304 m), orders must be in meters | Minimum length may vary based on cable configuration

General Specifications

Color, boot A	Blue
Color, connector A	Blue
Color, boot B	Blue
Color, connector B	Blue
Interface, Connector A	LC/UPC
Interface, Connector B	LC/UPC
Jacket Color	Yellow
Polarity	Pairs, flipped
Total Fibers, quantity	2
Transmission Standards	TIA/EIA-568-C.3


©2026 CommScope Technologies LLC, an Amphenol company. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners.
Revised: July 17, 2026

FFWLCLC42

Dimensions

Cable Assembly Length Range (m)	1 – 999
Cable Assembly Length Range (ft)	1 – 999
Diameter Over Jacket	1.6 mm | 0.063 in

Ordering Tree

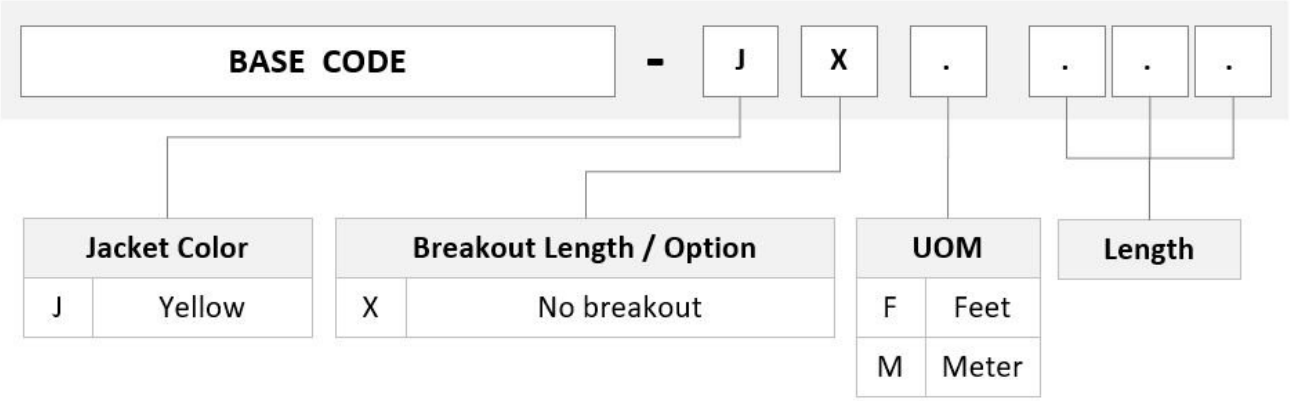

Mechanical Specifications

Cable Retention Strength, maximum	11.24 lb @ 0 ° | 4.40 lb @ 90 °

Optical Specifications

Fiber Mode	Singlemode
Fiber Type	G.652.D | G.657.A1, TeraSPEED®

Environmental Specifications

Operating Temperature	-10 °C to +60 °C (+14 °F to +140 °F)
Operating Temperature Note	Specification applicable to non-terminated bulk fiber cable
Environmental Space	Dual Rated LSZH/Riser

©2026 CommScope Technologies LLC, an Amphenol company. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners.
Revised: July 17, 2026

Packaging and Weights

Packaging quantity	1

Regulatory Compliance/Certifications

Agency	Classification
ANATEL	Compliant
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



Included Products

760021675 N-002-ZC-8W-F16YL/E	- Fiber Indoor Cable, TeraSPEED® 1.6mm Low Smoke Zero Halogen Riser, 2-fiber Zipcord, Singlemode G.652.D and G.657.A1, Feet jacket marking, Yellow jacket color, Eca Flame Rating
860655488	- LC/UPC Connector, Singlemode, Blue

©2026 CommScope Technologies LLC, an Amphenol company. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners.
Revised: July 17, 2026